

Affordable Camera Solutions for Tower, Hydraulic & Lattice Cranes

- 22X Optical Zoom-
- Nitrogen filled housing IP67 rated
- The camera is motorized ensuring auto level performance as compared to fluid filled systems
- Joystick toggle switch for mobile/RT cranes
- Operating temperature -22° F to +149° F
- Shock and vibration resistant
- Lens heating
- 0,2 lux black/white, 1.2 lux color
- Resolution 1,3Mp / 1200TVL PAL-system
- Autofocus
- 24Volt DC / 8 Watt
- Dimension 9"x3".5x3.5". (LxWxH)
- Dimension wide including axle 4.724"
- 2 Year Warranty
- Increase Operator & Site Awareness
- 10.1" & 13" Color Display options
- Eliminate Crane Hook System Battery Charging Hassles, & frustrating line of site issues

Dealer opportunities available! Inquire today

Proven, Reliable Technology that you can trust!!








Scale and Control Inc. Toll Free Tel: 888-239-0552.



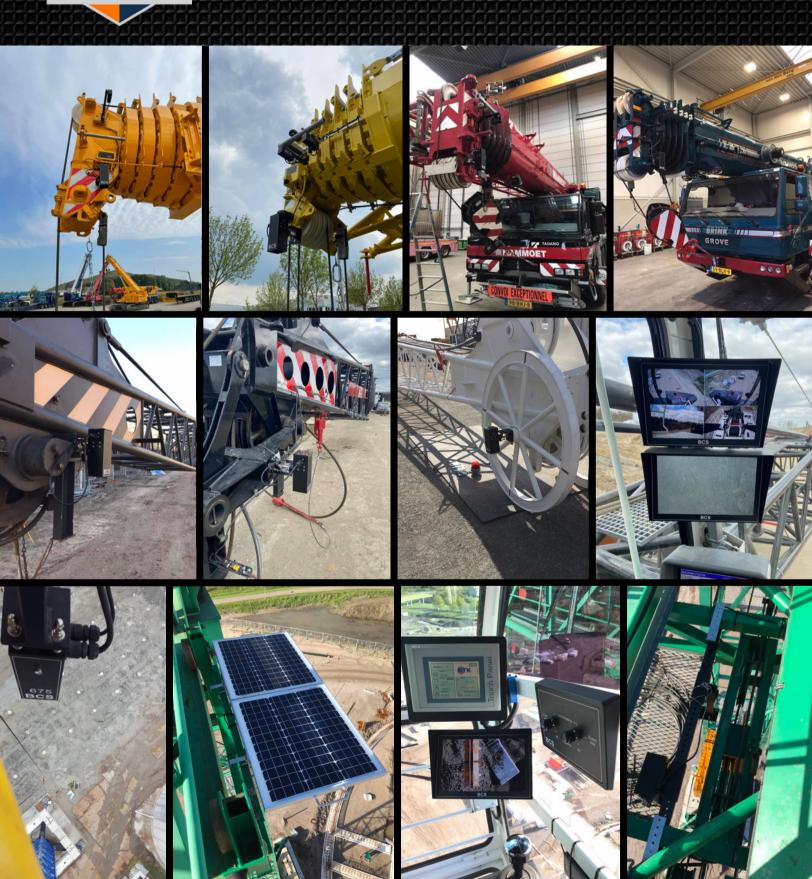

Scale and Control Inc. Toll Free Tel: 888-239-0552.





Scale and Control Inc. Toll Free Tel: 888-239-0552.



Camera System for Mobile Telescopic Cranes

- For mobile telescopic cranes BCS developed a unique camera equipped with an electrical auto-tilt module. This module makes sure that the camera is always pointed vertical and focussed at the hook or grab independently of the angle of the boom.
- The tilting angle is manually adjustable from within the cab to optimize the view.
- All the functions of the system can be operated by using the multifunctional remote control.
 Equipped with a wireless transmitter/receiver.

Advantages:

- The camera is insensitive for wind
- The camera can be mounted at less damage sensitive places
- The camera can change the viewing angle and therefore guarantees an optimal view
- The system contains the following components:
 Zoom camera, transmitter/receiver, remote control with joystick and HD monitor.



Scale and Control Inc. Toll Free Tel: 888-239-0552.