




# WLS350 Stationary Loader Scale

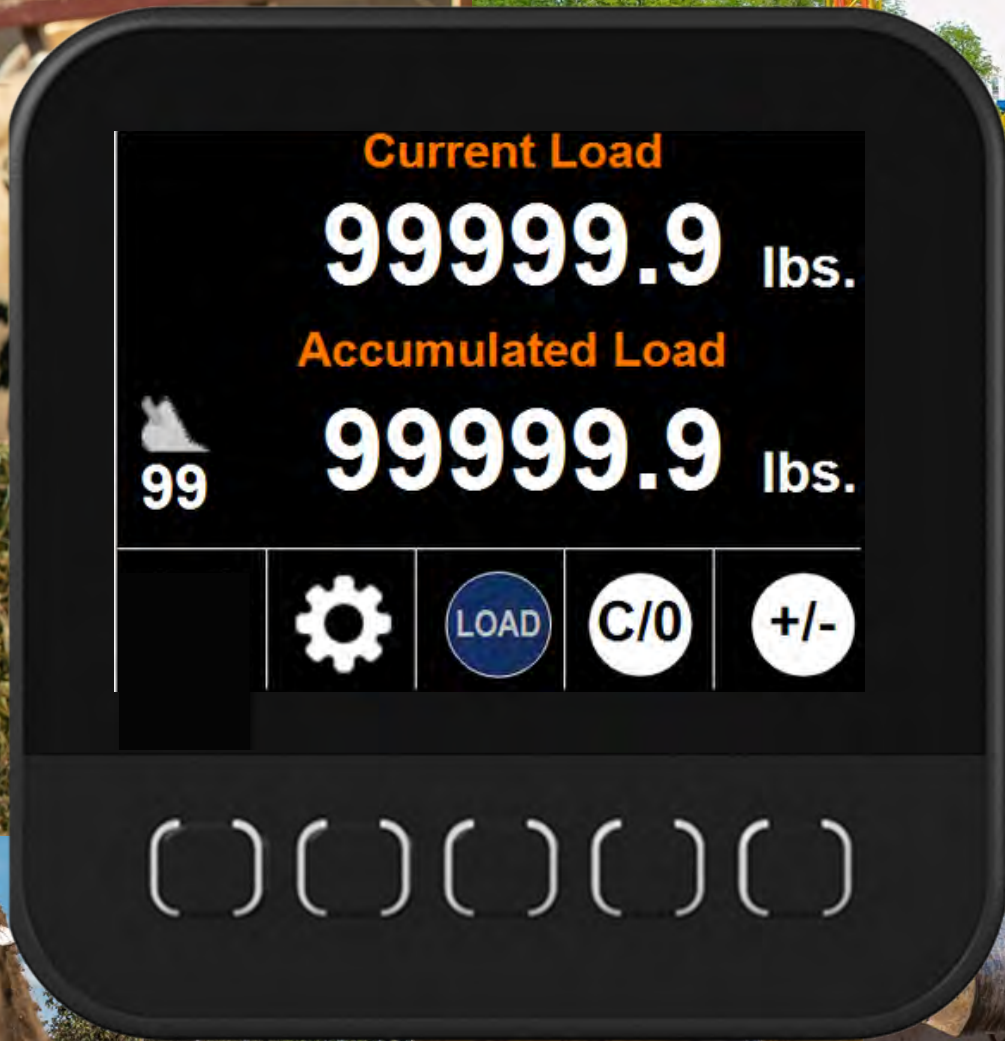


**Display, Pressure Transducer, Fitting Adapter, Wiring Harness**

Switch between  
2-active loads

**1-Hour Installation Time**

# WLS350 Screen Features

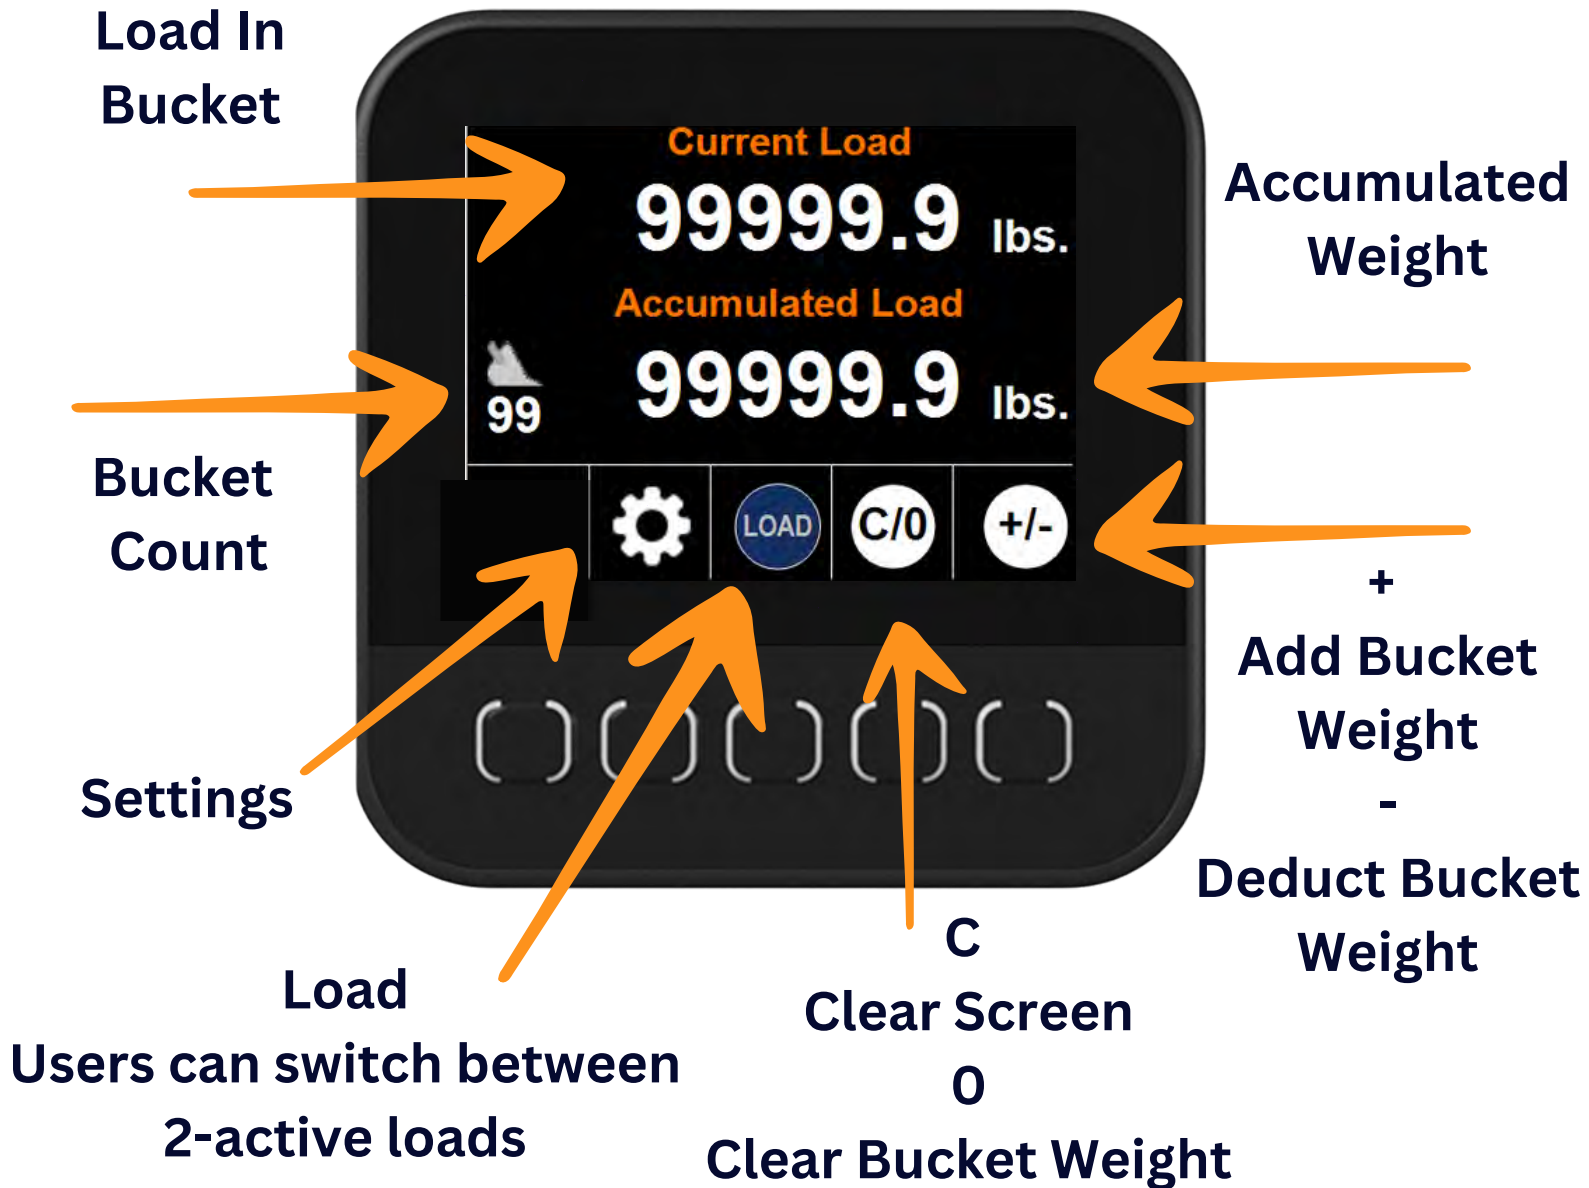

## WLS350 Scale Features

3.5" Color Display • Optically bonded for long life, full color TFT display provides excellent readability in normal to extreme environmental conditions, provides clear viewing from all angles • Auto On-Off heated display for extreme temperatures • IP67 wash down rated display • 320 x 240 px display • 24 bit color • 8-32VDC power supply • Less than 1/4 amp draw • Operating temperature -40F to +185F (-40C to +85C) • User's can switch between 2 active loads • Sunlight readable display \* User installable in just over 1 hour • 7 days a week technical phone support • Excellent price to value ratio • Includes display, ram bracket, wiring harness with waterproof connectors, 1-fitting adapter and 1 pressure transducer • + Button accumulates bucket weight • - button deducts last bucket

888-239-0552 • sales@scaleandcontrol.com • www.scaleandcontrol.com